


CATHODIC PROTECTION VOLTMETERS

MODEL CPV-2

10 M Impedance
Swing Needle Meter
"AA" Batteries
Filter AC Interference
0 - 2 volts DC scale
Color Code display

Use for potential reads:

- Anode to Structure
- Structure to Structure
- Insulated Flanges
- Structure to Earth

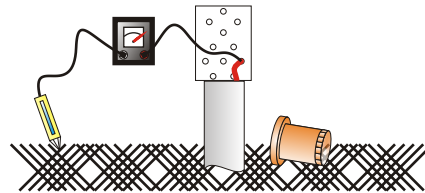

Both instruments come complete with:


- Instrument with battery
- Heavy Duty coiled cables with clamps
- Model 6-A Half Cell electrode
- Convenient carrying case

MODEL CPV-4

11 M Impedance
LCD Digital Meter
9 volt Battery
Filter AC Interference
2 volt and 20 volt DC scale
Meter displays + (POS) or - (NEG) reads

Use for potential reads:

- Anode to Structure
- Insulated Flanges
- Structure to Structure
- Structure to Earth

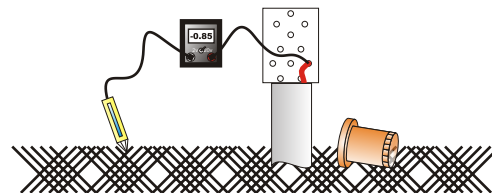

Distributed by

CPV-4



CPV-2



Tinker & Rasor Cu-Cu/SO4 half cell reference electrodes screw directly into the back of the meters!

Combine with optional extension handle for one hand operation.



TINKER & RASOR

CORROSION MITIGATION INSTRUMENTATION

PRODUCT DATA SHEET

MODEL CPV-2

Features:

- 10M Impedance
- $\pm 3\%$ of full scale
- 2v DC scale
- "AA" Batteries
- Color coded display

Construction:

Strong aluminum square tubing
Integrated circuits
Rugged analog meter

Applications:

- CP Potentials
- Structure to Earth
- Insulated Flanges

Dimensions:

3" Square (76mm)

MODEL CPV-4

Features:

- 11MW Impedance
- Digital LCD display (shows + or -)
- $\pm 0.1\%$ + last digit accuracy
- Dual scale, 0-.999v, 0-19.99v
- Includes reference cell and cables

Construction:

Durable die-cast aluminum case
Powder coat finish
Integrated circuits

Applications:

- CP Potentials
- Structure to Earth
- Structure to Structure

Dimensions:

4-5/8" x 3-5/8" x 2-3/16"
(117mm x 92mm x 59mm)

MODEL CPV-2 CP VOLTMETER



MODEL CPV-4 CP VOLTMETER

DELIVERY: **Immediately from STOCK**
F.O.B. San Bernardino, CA USA
SERVICE: **24-hour Turn-Around**
TERMS: Net30 Days, on approval of credit
WARRANTY: **90 Days**, parts and labor

AVAILABLE FROM STOCK