


CP DATA LOGGER



Interference
Shorts
Impressed Current
Structure-to-Cell
Telluric Events


Leave Behind Data Logger
Record as fast as 512 times a sec,
or as slow as once every 99 minutes.
540,000 reads in memory
4 Independent Channels
AC and DC Filtering
10Meg Impedance
TRAC Software, with single click graphing
Time/Date Stamp
Event Triggering

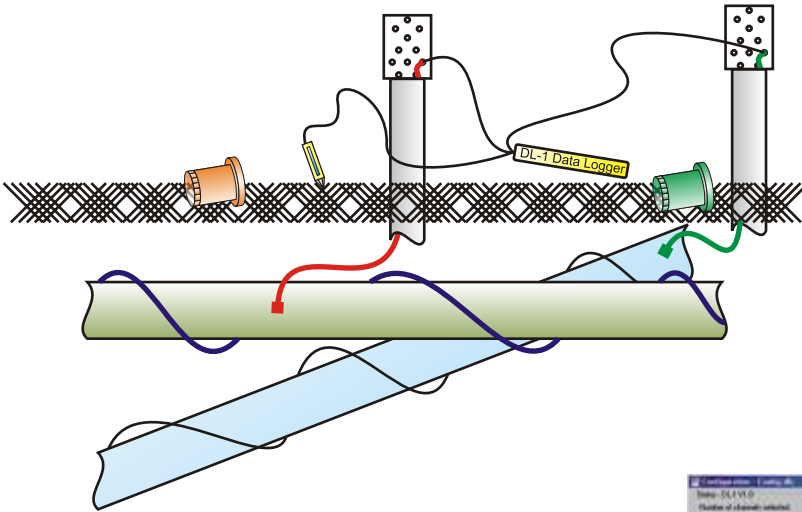

CONFIGURE



COLLECTED DATA

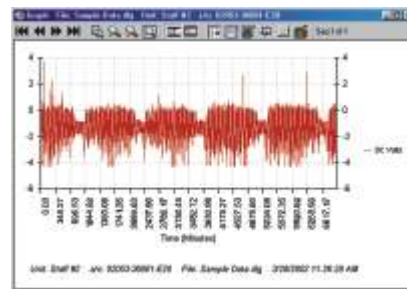

GRAPH OF DATA

Distributed by



DL-1 Data Logger with Data Collection cables

AVAILABLE FROM STOCK!

www.teststations.com

www.detectron.com

www.tinker-rasor.com

Info@tinker-rasor.com



Tinker & Rasor quality is found in our products,
our people and our customer service.



DATA LOGGER



TINKER & RASOR

CORROSION MITIGATION INSTRUMENTATION

PRODUCT DATA SHEET MODEL DL-1 DATA LOGGER

Features:

- 540,000 reads in memory
- Record 512 times a second to once every 99 minutes
- Data backup battery
- 4 Channels with independent ground
- 2 Channels with AC filtering, 0 - 5 volts
- 1 Channel with DC filtering, 0 - 300 volts RMS
- 1 Channel with no filtering, 0 - 100 volts
- 10 Meg Impedance
- RS232 Serial Connection to PC
- Status LED on instrument
- Easily concealed in T&R T-3 CP Test Station Riser pipe

Applications:

- Leave behind Data Logger
- CP reads over time
- Structure to Cell reads
- Anode output reads
- Telluric events
- Stray current reads

Software:

- TRAC software program included
- Free downloads on T&R website
- Configuration and setup notes saves in all data files
- Easy to use, single click graphing
- Exportable to other common programs

Environment:

Operating Temp. Range -
-10°C to 60°C (14°F to 140°F)

Storage Temp. Range -
-20°C to 70°C (-4°F to 158°F)

Specifications:


9v Battery (replaceable)
TRAC Software (downloadable)

Dimensions:

INSTRUMENT: 10.75" x 1.5" x 1.5", 0.5 lbs.
(273mm x 38mm x 38mm, 0.227Kg)

KIT: 12" x 6.75" x 4.5", 2 lbs.
(305mm x 171mm x 114mm, 0.908Kg)

SHIPPING: 13" x 7.5" x 5", 4 lbs.
(330mm x 191mm x 127mm, 1.81Kg)

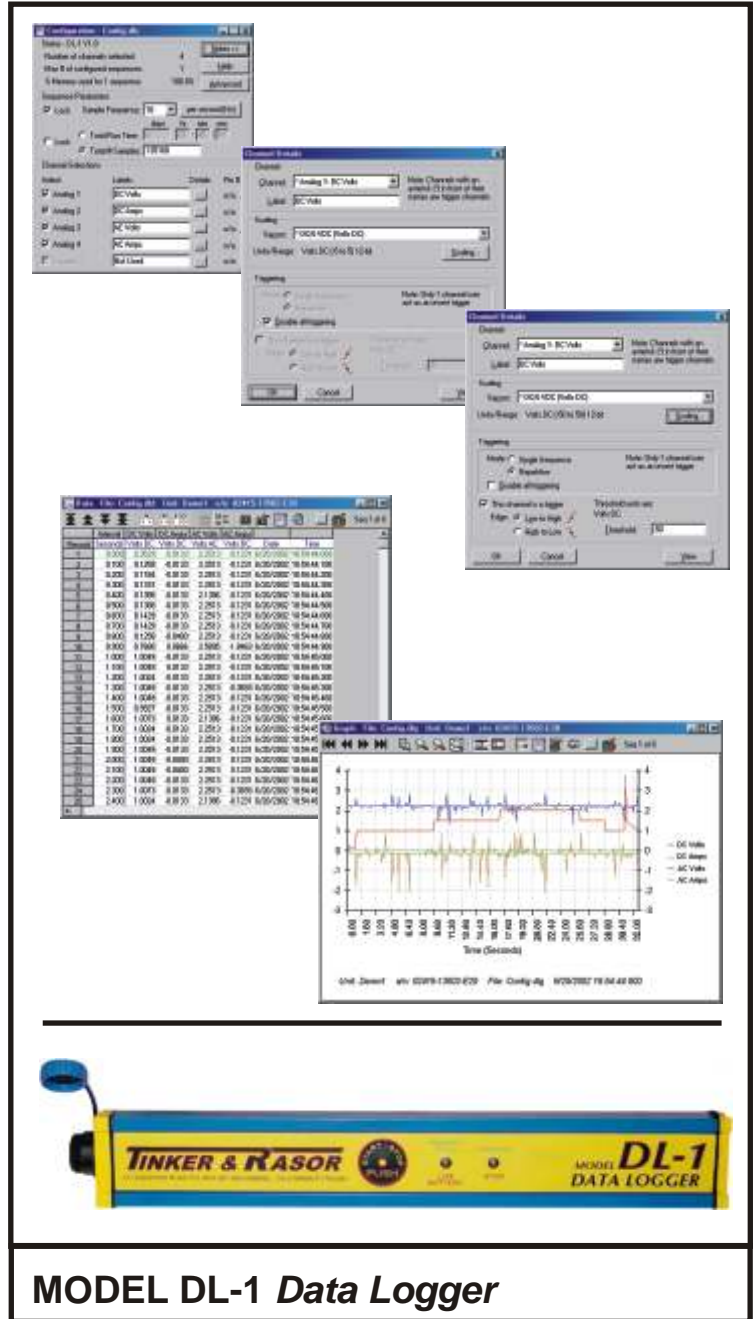

MODEL DL-1 Data Logger

DELIVERY: Immediately from STOCK
F.O.B. San Bernardino, CA USA

SERVICE: 24-hour Turn-Around

TERMS: Net30 Days, on approval of credit

WARRANTY: 90 Days, parts and labor

AVAILABLE FROM STOCK