


# TINKER & RASOR

## MODEL CS-10

### 10 AMP PORTABLE CURRENT SUPPLY

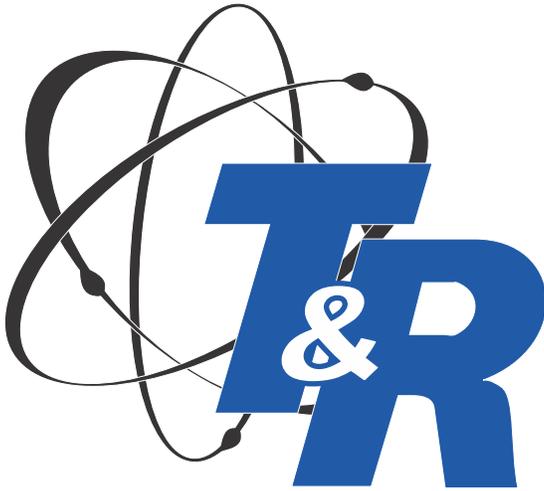

#### *For Cathodic Protection Testing*

- 0 - 10 Amps Adjustable Output
- LCD Display for Current Adjustment
- 1 milliamp resolution
- Continuous or Interrupted Operation
- Internal 12v Rechargeable Battery
- Use with External 12v DC Power
- Weather resistant, lockable case



**AVAILABLE FROM STOCK!**

Distributed by

The CS-10 portable current supply is an ideal DC current source for many cathodic protection corrosion maintenance tests. Commonly used for determining current requirements for cathodic protection or impressing current on an underground structure for assisting in locating electrical contacts with foreign systems such as underground utilities.

[www.teststations.com](http://www.teststations.com)

[www.tinker-rasor.com](http://www.tinker-rasor.com)

[www.detectron.com](http://www.detectron.com)

[Info@tinker-rasor.com](mailto:Info@tinker-rasor.com)



Tinker & Rasor quality is found in our products,  
our people and our customer service.



# TINKER & RASOR



CORROSION MITIGATION INSTRUMENTATION

## PRODUCT DATA SHEET

### MODEL CS-10 Portable Current Supply

#### Features:

- Adjustable DC Output from 0 to 10 Amps
- External Power input (12v DC)
- Output Range: 1 Amp, 10 Amp
- Continuous Operation
- Interrupter Timing:
  - 0.2 sec OFF - 0.8 sec ON
  - 0.3 sec OFF - 0.7 sec ON
  - 1 sec OFF - 4 sec ON
  - 2 sec OFF - 8 sec ON
  - 6 sec OFF - 14 sec ON
- LCD display of output, 1mA resolution
- Portable
- Lightweight, only 6 lbs

#### Construction:

- Near indestructible case
- Weather sealed
- Lockable lid
- Built for rugged use

#### Applications:

- CP Current Requirements
- CP Maintenance Tests
- Locating shorts and contacts
- Casing shorts
- Insulator testing and locating
- DCVG

#### Environment:

0°C to 50°C (32°F to 122°F)

#### Specifications:

12v DC Output  
12v LiFePO4 Battery (rechargeable)  
9v Battery (replaceable)

#### Use Dimensions:

5.75" x 12.25" x 10", 6 lbs  
(146mm x 311mm x 254mm, 2.72kg)

#### Shipping Dimensions:

14" x 12" x 6", 8 lbs  
(355.6mm x 304.8mm x 152.4mm, 3.63kg)



NEW! Redesigned panel layout and now with rechargeable Li battery

NEW!  
Faster  
interrupt  
cycles

#### INTERRUPT CYCLES

Pos	Sec. Off/On
1	CONTINUOUS
2	0.2 - 0.8
3	0.3 - 0.7
4	1 - 4
5	2 - 8
6	6 - 14

AVAILABLE FROM STOCK

DELIVERY: **Immediately from STOCK**  
F.O.B. San Bernardino, CA USA  
SERVICE: **24-hour Turn-Around**  
TERMS: Net30 Days, on approval of credit  
WARRANTY: **90 Days**, parts and labor