Delectron®




MODEL XL-2 Acoustic Leak Locator

Features:
11 Filters
2 Sensitivity Controls
High Gain Amplifier
Super Sensitive magnetic transducer
7" Probe
Visual & Audible Indicators
Rugged construction
Battery Operated with battery condition indicator
1 Year Warranty

Find leaks quickly and accurately with the all new XL-2. The instruments high gain, sensitivity adjustment and filtering lets you reduce other noises and focus on the leak.

AVAILABLE FROM STOCK!

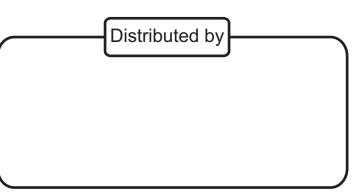

Leak Detector

Used by:
Oil Industry
Water Dept.
Plumbers
Contractors
Maintenance Eng.

www.tinker-rasor.com

www.detectron.com Info@tinker-rasor.com

www.teststations.com



Tinker & Rasor quality is found in our products, our people and our customer service.

INKER & RASOR

CORROSION MITIGATION INSTRUMENTATION

PRODUCT DATA SHEET MODEL XL-2 DELUXE LEAK LOCATOR

Features:

- 11 position filter to pinpoint leak and remove background sounds
- · High gain, 4-stage amplifier
- Visual and Audible indications
- Coarse and Fine Sensitivity
- Extremely sensitive pickup with removable 7" (177.8 mm) probe
- Removable Wind Guard for probe
- Pressure fitting to increase pressure in water systems
- Rugged, for outdoor use

Construction:

Thermo plastic resin case In Case storage area

Applications:

- Sound locator
- · Liquid leaks in buried pipes
- High pressure leaks

Recommendations:

Used by:

Plumbers • Contractors • Water Dept's Oil Industry • Maintenance Engineers

Dimensions:

Weight: 5 lbs (2.27 kg)

Shipping Weight: 8 lbs (3.63 kg)

14" x 12" x 6", 12 lbs

(355.6mm x 304.8mm x 15.24mm, 5.44kg)

DELIVERY: Immediately from STOCK

F.O.B. San Bernardino, CA USA

SERVICE: 24-hour Turn-Around

TERMS: Net30 Days, on approval of credit

WARRANTY: 1 Year, parts and labor



Easy to use and adjust panel puts all controls at your fingertips.

Kit Includes:

- (1) Instrument and 9v Battery
- (1) 122-001 Pickup
- (1) Wind Guard
- (1) 7" Probe extension
- (1) Headphones, 300 Ohm, Over Ear
- (1) Pressure Fitting, pressurize water systems to increase leak signal

AVAILABLE FROM STOCK